



EPR-3000

High Precision 3000 psi Electronic Pressure Controller Accurate to 0.25% of full scale

General Specifications

PRECISE CONTROL UP TO 3000 PSI

The Equilibar EPR-3000 dual valve pressure controller accurately and efficiently controls pressure within a closed system with minimal loss of expensive gases through the exhaust process.

The EPR-3000 is a significant advance in the precision and convenience of electronic pressure control above 1000 psig. Using dual proportional valve construction, the EPR-3000 avoids the waste of inert supply gas sometimes experienced with other controllers. The analog valves also provide high resolution in the range of 0.1%.

PERFORMANCE	EPR-3000 CONTROLLER	
Maximum Pressure	3000 PSIG	
Maximum Inlet Pressure	3300 PSIG	
Full scale pressure accuracy	± 0.25%	
Maximum Flow	50 SLPM at 3000 PSIG Supply and 1500 PSIG Setpoint	
Repeatability	± 0.08% Full Scale	
Zero Shift and Span Shift	0.02% Full Scale / ºCelsius	
Operating Range / Turndown Ratio	0.5% to 100% Full Scale / 200:1 Turndown	
Excess Pressure	102.4% FS Controllable	
Burst Pressure	3 X Full Scale	
Typical Response Time ¹	100 ms (Adjustable)	
Warm-up Time	< 1 Second	
¹ Volumes, feed pressures, exhaust pressures and line sizing will determine the limits of response times.		

ΑI	LX	<u></u>
OP	ΕΧ ΓΙΟΝ	$\langle x3 \rangle$
AVAI	LABLE	

OPERATING CONDITIONS	EPR-3000 CONTROLLER	
Gas Compatibility	Compatible with all non-corrosive gases	
Operating Temperature	-10 to +60 ºCelsius	
Mounting Altitude Sensitivity	None	
Valve Type	Normally Closed	
Ingress Protection	IP40	
Wetted Materials	302 & 303 Stainless Steel, Viton®, Silicone RTV, Brass, 400 Series Stainless Steel, Silicon, Glass.	


Viton[®] is a registered trademark of DuPont.

COMMUNICATION / POWER	EPR-3000 CONTROLLER		
Monochrome LCD or Color TFT Display with integrated touchpad	Control Input / Displays Pressure		
Digital Input / Output Signal Options	RS-232 Serial / RS-485 Serial / ModBus		
Analog Input / Output Signal ² Options	0-5 Vdc		
Optional Secondary Analog Input/Output Signal ²	0-5 Vdc		
Electrical Connection Options	8 Pin Mini-DIN		
Supply Voltage	12-30 Vdc		
Supply Current	0.250 Amp		
¹ The Digital Output Signal communicates Pressure			

MECHANICAL SPECIFICATIONS	MECHANICAL DIMENSIONS	PROCESS CONNECTIONS
EPR-3000 Standard Range	4.067"H x 5.875"W x 1.050"D	1/8" NPT Female


CONTACT EQUILIBAR FOR MORE INFORMATION

EPR-3000 Dimensional Drawing

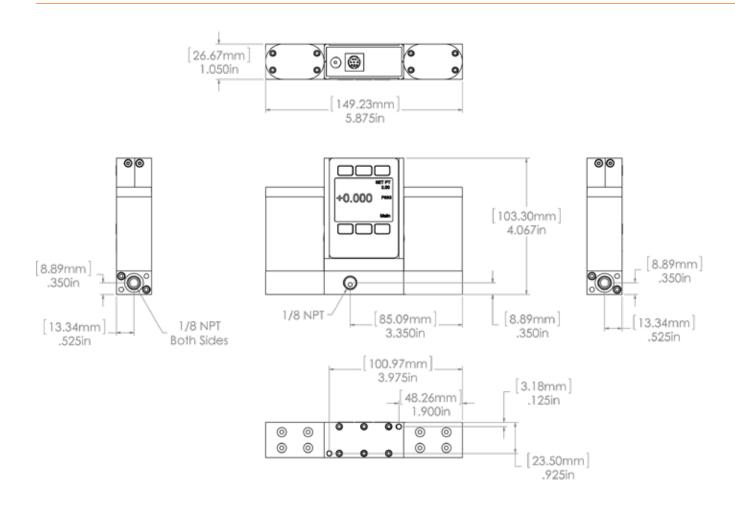

How it Works

Two valve pressure controllers include a "fill" and "vent" valve. Outlet pressure is sensed and controlled through a type of PID loop. While many industrial pressure controllers utilize binary fill and vent valves, or analog fill valves with binary vent valves, the EPR-3000 uses two analog valves for highly precise and resolute control throughout the entire range.

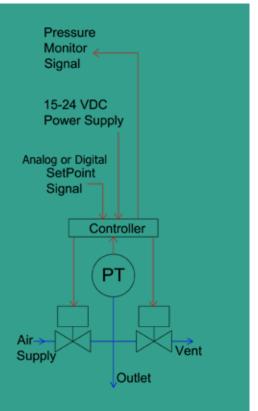


Key Performance Features and Applications

KEY PERFORMANCE FEATURES

- Proportional inlet/outlet valves for maximum stability
- No gas wasted at steady state
- Very high resolution with 0.25% accuracy
- Digital or analog communications
- Direct control from the keypad


CATALYST RESEARCH REACTOR CONTROL

The EPR-3000 is designed for static to low-flow applications of inert gas such as nitrogen or air. One common application is to provide a high pressure pilot signal for dome-loaded regulators requiring pressures above 1000 psig. In the schematic below, the EPR-3000 is used to control the output pressure of a catalyst research reactor. Because both the EPR-3000 and the Equilibar® back pressure regulator have no significant hysteresis or dead-band, it is possible to precisely control reaction conditions even with highly varying process flow rates.

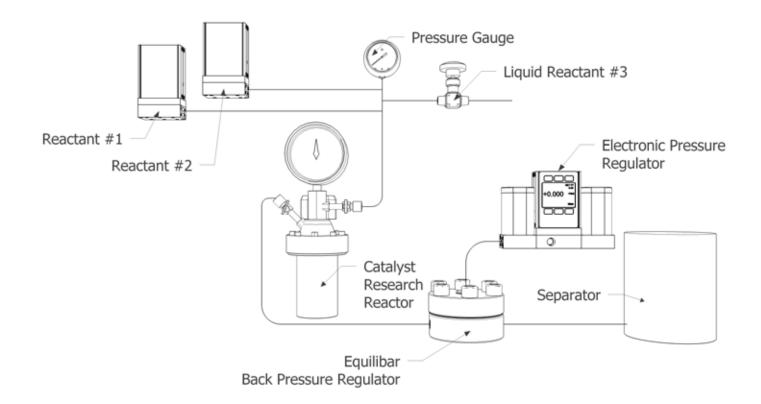


Common Applications

PRECISION PRESSURE CONTROL

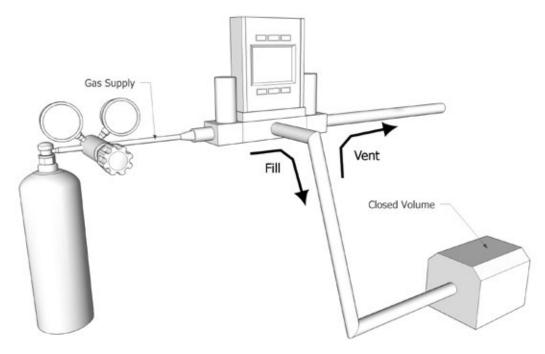

The EPR-3000 accurately controls pressure by either adding or venting compressed gas as required. No gas is consumed in the steady state.


ELECTRONIC BACK PRESSURE CONTROL

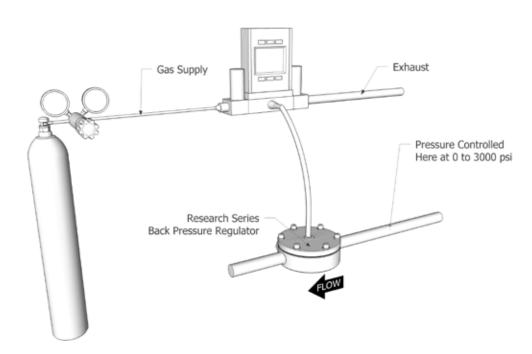



The EPR-3000 is an excellent pilot regulator to electronically control an Equilibar® precision back pressure regulator.


CONVENIENT COMMUNICATION & CONNECTIONS

The EPR-3000 can be quickly commanded using the convenient keypad interface. The EPR can be automated through either the analog interface or by use of a Serial (RS-232 or RS-485) connection. Power supply for the unit (12-30 VDC) can be provided through an included power brick, or provided through the DIN connector.

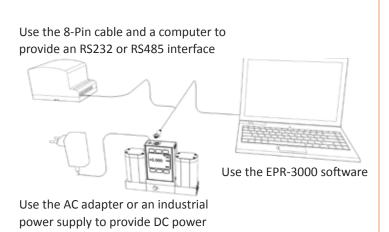

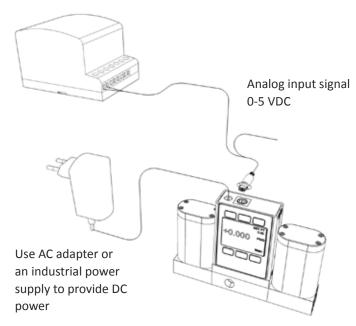

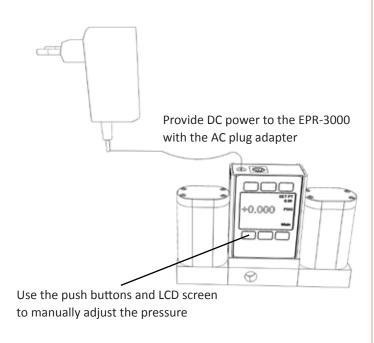

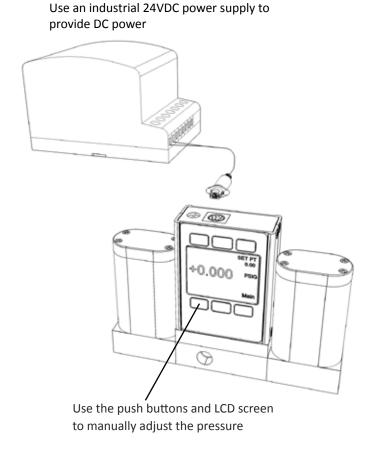

About Equilibar

Equilibar provides innovative and robust pressure control technology for researchers and engineers worldwide. We are proud to design, manufacture, and test our patented back pressure regulators in our factory overlooking the Blue Ridge Mountains near Asheville, NC.

APPLICATION ENGINEERING— WHAT SETS US APART

Unlike mass-market regulator distributors, we focus on working with you, the scientist or engineer with a complex pressure control scenario.


Our application engineers work collaboratively with clients to identify the optimal model, trim, and diaphragm for each application's unique challenges. No matter where you are on the globe, you can stay in close contact with your engineer by email, telephone, videoconferencing, or fax.

After installation, your application engineer will support you with start-up information and fine-tuning as needed.

Equilibar, LLC
320 Rutledge Rd.
Fletcher, North Carolina 28732
United States
Tel: +1-828-650-6590
Fax: +1-801-504-4439
Monday - Friday
8:00 AM - 5:00 PM EST
12:00 - 21:00 GMT
inquiry@equilibar.com



Each application is reviewed by our engineering team to ensure quality performance of our products.

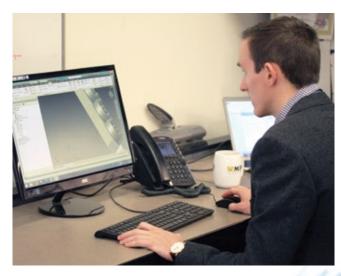

Our engineers offer custom designed solutions for the most difficult pressure control challenges. Feel free to contact us to discuss your situation.

